

TITLE: IMPROVEMENTS TO MANUALLY HELD DENTAL FLOSSERS

Inventor(s): Michael KOSSAK et al.

Docket No. 2093-002B


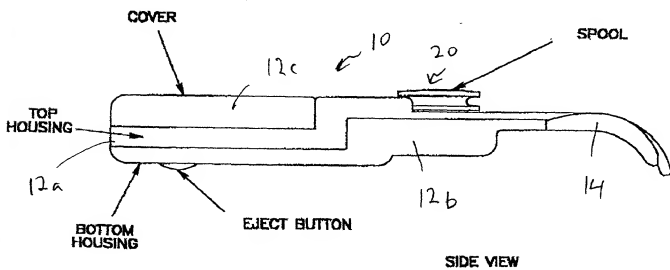


Fig. 1



TITLE: IMPROVEMENTS TO MANUALLY HELD DENTAL FLOSSERS
Inventor(s): Michael KOSSAK et al.
Docket No. 2093-002B

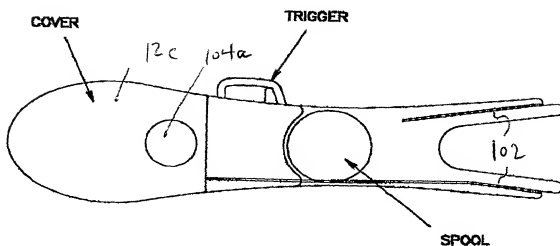

TOP VIEW

Fig. 3

09975558-101201

TITLE: IMPROVEMENTS TO MANUALLY HELD DENTAL FLOSSERS

Inventor(s): Michael KOSSAK et al.

Docket No. 2093-002B

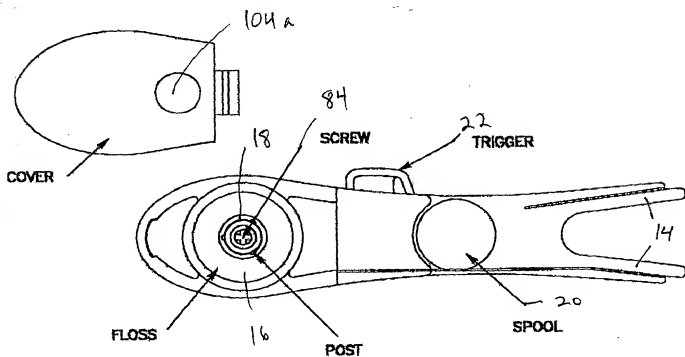


Fig. 5

TOP VIEW
COVER OFF

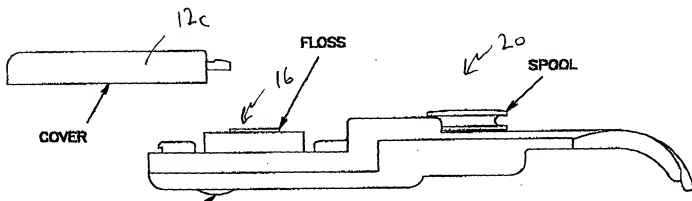


Fig. 4

TITLE: IMPROVEMENTS TO MANUALLY HELD DENTAL FLOSSERS

Inventor(s): Michael KOSSAK et al.

Docket No. 2093-002B

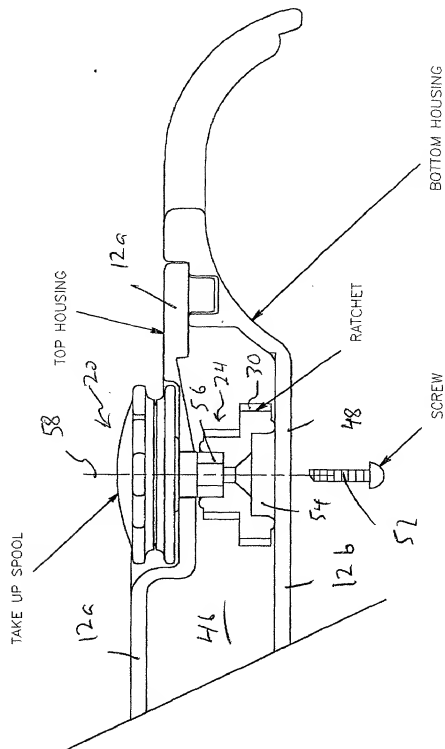


Fig. 6

TITLE: IMPROVEMENTS TO MANUALLY HELD DENTAL FLOSSERS

Inventor(s): Michael KOSSAK et al.

Docket No. 2093-002B

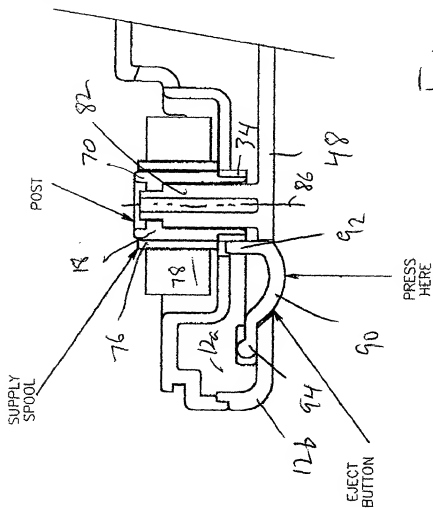



Fig. 7

EJECT BUTTON IS TRAPPED BETWEEN THE TOP AND BOTTOM HOUSING. IT IS ACCESSED FROM THE BOTTOM OF THE UNIT. WHEN THE BUTTON IS PRESSED, IT WILL ROTATE UP AND PUSH ON THE PLASTIC CORE OF THE SUPPLY SPOOL TO RELEASE IT FROM THE POST. IT IS INTENDED FOR THE SPOOL TO LIFT UP ENOUGH TO RELEASE THE FIT AND MAKE IT EASY FOR THE CONSUMER TO REMOVE THE SPOOL FROM THE POST.

102101'85552660

SCALE 2:1

Fig. 8C



POST
 THE POST IS PLACED OVER THE BOSS ON THE INSIDE OF THE BOTTOM HOUSING. IT IS HELD IN PLACE WITH A SCREW BUT CAN ROTATE FREELY.

SUPPLY SPOOL
 THE SUPPLY SPOOL IS PLACED OVER THE POST. THE KEYWAYS ON THE INSIDE DIAMETER ENGAGE WITH THE KEY RIBS, PREVENTING THE SPOOL FROM ROTATING ON THE POST.

THE SUPPLY SPOOL OF FLOSS IS PLACED OVER THE TOP OF THE POST.

Fig. 8B

THE BRAKE TOOTH ON THE TRIGGER AND THE TENSION CLICKER ENGAGE WITH THESE TEETH.



8A

Fig.



KEYWAYS
 PLASTIC CORE OF FLOSS SPOOL
 FLOSS

Fig. 9A



SIDE VIEW

